



**TITLE:**

Alarm Type 1 Copper LSZH

**CODE:**



SFX/8C-TY1-SCR-LSZH-D-WHT-100

**DESCRIPTION:**

100m 8 Core Type 1 Alarm Screened White LSZH

**SUPPLIED AS:**

Reel of 100m

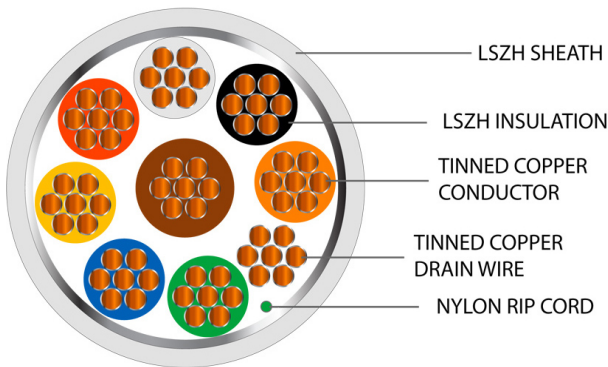

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



## Product Specification

### Cable Construction

Cable Construction	8 Cores
CPR	Dca -s1 -a1 -d1
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7
Overall Diameter (mm)	4.60 ±0.200

### Insulation

Insulation	LSZH
Insulation Colour	Red,Black,Blue, Yellow,Green,White,Orange,Brown
Insulation Resistance @20°C	>200 MO/km
Insulation Thickness (mm)	0.21

### Outer/Jacket Specification

Jacket	LSZH
Overall Colour	White
Overall Diameter (mm)	4.60 ±0.200
Jacket Colour	White RAL 9003
Jacket Thickness (mm)	0.5
Nylon Rip-Cord	Green 210D

### Electrical Characteristics

Insulation Resistance @20°C	>200 MO/km
Max Conductor DC resistance @ 20°C	100O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	30V



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



# ALARM CABLE



## MORE INFORMATION:

Sorry, no more information is available for this product

Alarm cable



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

